

Industrial Diesel Genset

DV 375

POWER RATING	1500 rpm/50 Hz	1800 rpm/60 Hz
Prime	375 kVA, 300 kW	406 kVA, 325 kW
Standby	407 kVA, 326 kW	443 kVA, 354 kW

Generator set consisting of engine and alternator mounted on a fabricated steel profile base, finished with a phosphate coating and top coat.

The alternator is directly coupled to the engine flywheel housing to SAE standards. The rotor is fixed to the flywheel using steel discs for flexibility. Perfect alignment and the absence of vibration are thus guaranteed.

The unit is fixed to the baseframe using anti-vibration pads.

ENGINE

4-stroke diesel with direct injection.

Manufacturer.....	Volvo Penta
Model	TAD 1230 G
N° of cylinders	6
Engine capacity.....	11980 cc
Bore	130.17 mm
Stroke	150 mm
Compression ratio	14 : 1
Aspiration.....	Turbocharged
Cooling.....	Water
Engine speed 50 / 60 Hz	1500 / 1800 rpm
Prime power 50 / 60 Hz	438 / 479 hp ISO 3046
Fuel consumption 100% load 50 / 60 Hz.....	73 / 85 ltr/h
Fuel tank capacity.....	620 litres
Approximate running time without refill 50 / 60 Hz	8 / 7hours

Cooling system

Closed circuit water cooled with expander tank included in the radiator. Tropicalised radiator and pusher fan with guard. Equipped to work at ambient temperature of up to 52° C.

Cooling air flow from fan 50 / 60 Hz	183 / 264 m3/min
Cooling system capacity.....	48 litres

Lubrication system

Forced lubrication using gear driven pump. Oil filter

Oil sump capacity	34 litres
Consumption	0.18 ltr/h

Aspiration system

Turbocharged aspiration via dry air filter and intermediate water cooling system of aspirated air



Aspired air flow 22.9 m3/min

Injection system

Injection pump in line with GAC electronic governor. Fuel filter and pre-filter.

Electrical system

24 V electric starting system. Axial starter motor. 2x180 Ah battery. 60 Amp battery charging alternator. Oil pressure and engine temperature sensors.

Protection system

Automatic engine shutdown for low oil pressure, low fuel level, high temperature and battery charge defect.

Exhaust system

Consists of silencer with 10 db(A) noise reduction, flexible exhaust pipe and brackets. Residential silencer optional.

ALTERNATOR

Synchronous, three phase and brushless. Self regulation via automatic voltage regulator maintaining voltage within +/- 1.5%. Class "H" insulation. All windings are impregnated with polyester resin, making them resistant to acids and oil. IP 22 protection. Electrical characteristics to BS 5000, VDE 0530, UTE 5100, NEMA MG 1-22, CMA IEC 34, CSA 22,2 and AS 1359. Harmonic distortion below 3,5%. Radio interference suppression to BS-800.

Manufacturer	Stamford
Model	HC 444 F
Power rating.....	380 kVA at 1500; 456 kVA at 1800 rpm
Voltage (*).....	380/220 V three phase
Frequency.....	50 / 60 Hz
Speed	1500 / 1800 rpm
Regulation.....	Electronic
Nominal current	548 A

(*) 12 wire output permitting reconnection to any existing voltage.


VERSIONS

The **DV 375** generator set may be supplied in the following versions:

STATIONARY, STATIONARY WITH CANOPY, MOBILE WITH CANOPY AND AUTOMATIC

STATIONARY

In the stationary version, the set is supplied on a skidbase and with a control panel operated manually using an ignition key.

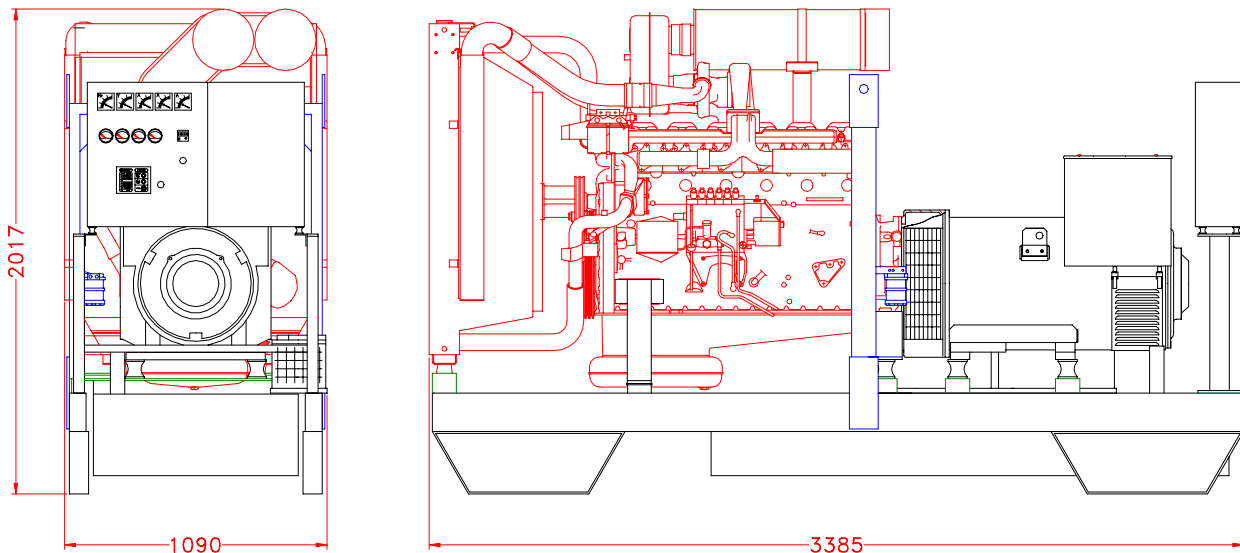

Control panel

Metal cabinet, with IP 54 protection, mounted on the frame with anti-vibration pads.

Equipped with:

- 3 Ammeters.
- Frequency meter.
- Voltmeter with selector switch.
- Hours run meter.
- Three phase output terminals.
- Engine temperature gauge.
- Fuel gauge.
- Oil pressure gauge.
- Battery charge ammeter
- On light.
- Heater button.
- Overcurrent indicator lamp.

Control board including: ignition key, start/stop buttons and indicator lamps for low oil pressure, battery charge, high temperature, low fuel level, overload and start-up failure.


Power panel

In metal cabinet, with IP 54 protection, mounted on frame with anti-vibration pads.

Equipped with automatic circuit breaker.

STATIONARY WITH CANOPY

In this version, the set is supplied on a skidbase with a metal canopy for outdoor use. The control panel is set in the canopy and is operated manually using an ignition key.

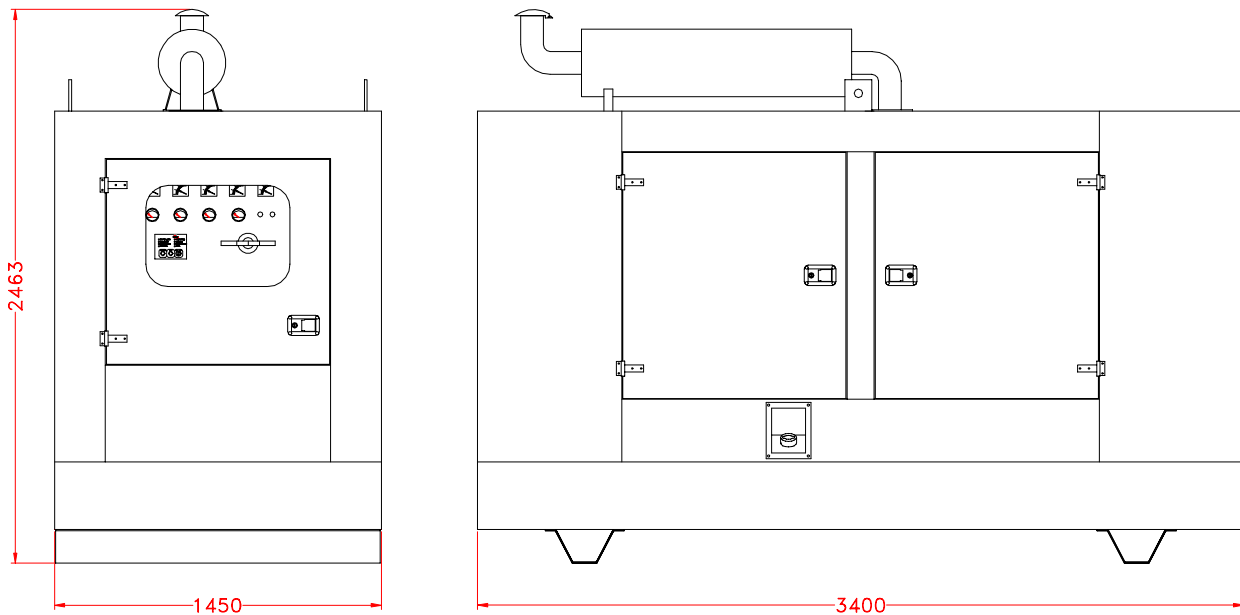

Metal canopy

Ideal for outdoor use, it is finished with a phosphate coating and a long lasting top coat of paint.

Control panel

Metal cabinet, with IP 54 protection, mounted on the baseframe with anti-vibration pads. Equipped with:

- 3 Ammeters.
- Frequency meter.
- Voltmeter with selector switch.
- Hours run meter.
- Three phase output terminals.
- Engine temperature gauge.
- Fuel gauge.
- Oil pressure gauge.
- Battery charge ammeter
- On light.
- Heater button.
- Overcurrent indicator lamp.

Control board including: ignition key, start/stop buttons and indicator lamps for low oil pressure, battery charge, high temperature, low fuel level, overload and start-up failure.


Power panel

In metal cabinet, with IP 54 protection, mounted on frame with anti-vibration pads.

Equipped with automatic circuit breaker.

MOBILE WITH CANOPY

Set on baseframe mounted on independent trailer. Incorporates metal canopy housing the control panel and is operated manually via an ignition key.

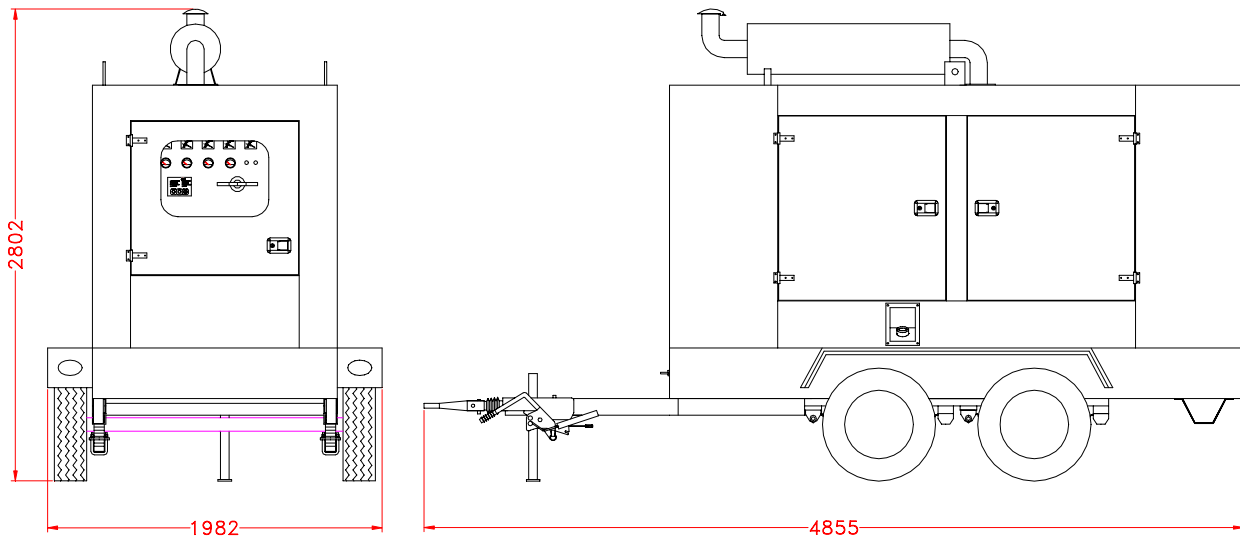

Metal canopy

Ideal for outdoor use, it is finished with a phosphate coating and a long lasting top coat of paint

Trailer

Made up of: wheels with pneumatic tyres, DIN towing eye, double rubber axle suspension, surge brake and support leg. Jockey wheel on request. As an option, a trailer adapted for road transportation may also be supplied.

Control panel

Metal cabinet, with IP 54 protection, mounted on the baseframe with anti-vibration pads. Equipped with:

- 3 Ammeters.
- Frequency meter.
- Voltmeter with selector switch.
- Hours run meter.
- Three phase output terminals.
- Engine temperature gauge.
- Fuel gauge.
- Oil pressure gauge.
- Battery charge ammeter
- On light.
- Heater button.
- Overcurrent indicator lamp.

Control board including: ignition key, start/stop buttons and indicator lamps for low oil pressure, battery charge, high temperature, low fuel level, overload and start-up failure.

Power panel

In metal cabinet, with IP 54 protection, mounted on frame with anti-vibration pads. Equipped with automatic circuit breaker.

AUTOMATIC

The automatic version generator set is supplied on a skidbase with an automatic start/stop panel for mains failure.

ELECTRICAL PANEL

Mounted in a metal cabinet with IP 54 protection and supplied loose for wall mounting. Includes control, measuring and transfer system.

Monitoring and control system

Automatically monitors the mains, and, if the mains fails (in one or all three phases) connects the consumers to the generator set via contactors which are mechanically and electronically activated. When the mains is restored, the load is reconnected to the mains, the set idles and then stops. Equipped with:

- Push button controls, indicator lamp and protection fuses.
- No. of start up attempts: 3
- Three phase voltage monitor with adjustable values.

Measuring equipment

Consists of the following items:

- 3 Ammeters
- 1 Voltmeter
- 1 mains-generator set voltmeter selector switch.
- 1 Frequency meter
- 1 Battery voltmeter.
- Selector switch for Disconnect, Automatic Service, Manual Service and Test
- Off button.
- Start-up selector switch.
- Heater indicator lamp.
- Battery maintenance system.
- Audible alarm for faults
- Visual alarm system for low oil pressure, high temperature and/or overload.
- Large emergency stop push button.

The set may be selected to run manually or automatically: When running manually a pushbutton is used for shutdown and a selector switch is used for start-up and changeover.

Transfer system

Made up of two 800 A contactors with mechanical and electrical activation

WORKING VOLTAGE: 380/220 V

Heater

In this version, the set incorporates a heater which aids diesel engine start-up and response. It consists of a tank connected to the engine cooling system and a heating element with an adjustable thermostat.