
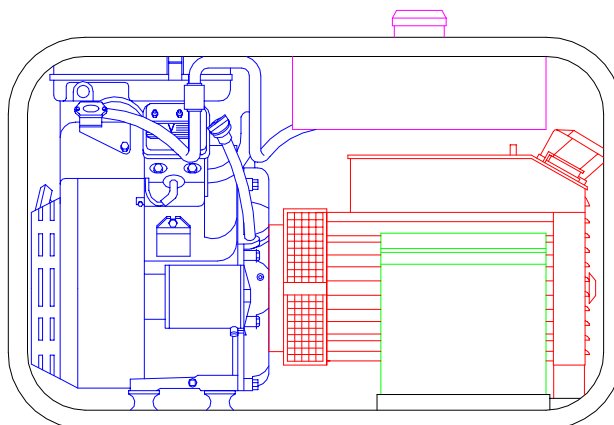


Industrial Generator

PSG-7Tf V

POWER RATING	3000 rpm/50 Hz	3600 rpm/60 Hz
Prime	7 KVA, 5,6 KW	8,4 KVA, 6,8 KW

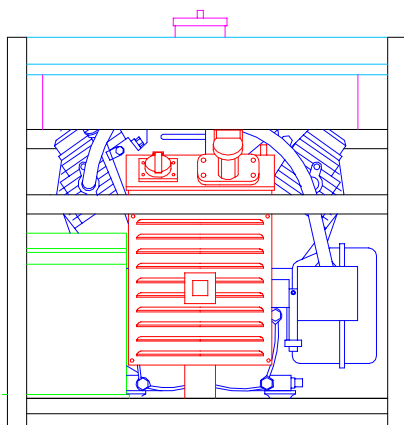

GENERATOR SET

Generator set consisting of engine and alternator, with monoblock coupling, mounted on a square profile frame using anti-vibration pads.

Dimensions: Length: 720 mm, Width: 500 mm, Height: 500 mm
Weight: approx. weight: 80 kg

ENGINE

4-stroke petrol engine with overhead valves.
Electronic ignition and centrifugal speed governor.
Splash type lubrication. Dry air filter. Equipped with OIL ALARM with automatic engine shutdown for low oil level.

Manufacturer..... HONDA
Model GX 390 VX
Engine capacity..... 389 cc
Power rating 13 HP at 3600 rpm
Fuel consumption..... 3 ltr/h
Fuel tank capacity 6,5 litres
Max. running time 2,2 h without refill
Noise level..... 82 dB(A) at 7 metres

ALTERNATOR

Three phase and self-regulating, maintains voltage within +/- 4% in static conditions. IP 23A protection.

The alternator is equipped with 1 single phase socket and 1 three phase socket. Thermal trip.

Power rating 5600 W
Voltage 220/380V 1/3~
Frequency..... 50 Hz
Speed 3000 r.p.m.
Regulation Compound
Aux. output 220 Vac/ 1~
Aux. output power rating..... 1600 W

OPTIONS:

- wheel kit
- electric starter (supplied with battery)
- Control panel including:
Voltmeter - hours run meter - 16 A single phase socket - 32 A three phase socket - thermo-magnetic circuit breaker - operation on light