
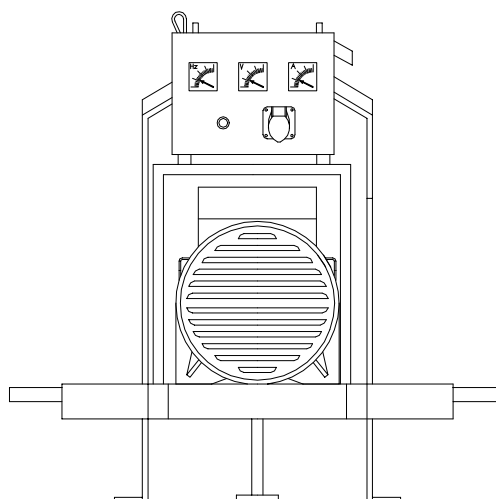


Tractor GenSet TL 50

1500 rpm / 50 Hz: 50 kVA / 40 kW

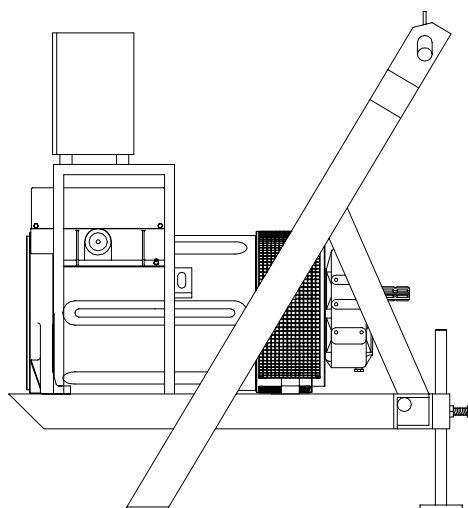

Generator set consisting of multiplier-alternator unit mounted on fabricated steel profile baseframe, painted with phosphate primer and top coat. Exterior of the alternator coupled directly to the multiplier to SAE standards. Rotor fixed to the multiplier via a shaft with a cotter groove. This assembly guarantees perfect alignment.

The unit incorporates three anchoring points by which it is fixed to the engine.

Power entering the P.T.O. shaft must be approximately 450 revolutions.

The multiplication ratio is 1:3.5

ALTERNATOR

Three phase. Self-regulating and self-ventilating. Self-exciting. IP23 protection. Maintains voltage within +/- 1%. Complies to CE13, IEC 34.1, VDE 0530 and BS 4999.

Radio interference: meets grade G of standard VDE 0875.

Manufacturer Mecc Alte
Model ECSN 31 LB
Power rating 50 kVA
Voltage (*) 380/220 V three phase

Frequency 50 / 60 Hz
Speed 1500 / 1800 rpm
Regulation Electronic
Nominal current 60.7 A

CONTROL PANEL

The control panel features a voltmeter, an ammeter, a thermo-magnetic circuit breaker, an on light, a single phase socket and three phase output terminals.